

AD-A082 036

NORTH CAROLINA STATE UNIV RALEIGH BURLINGTON LABS

F/G 7/4

SINGLE CRYSTAL EPITAXY AND CHARACTERIZATION OF BETA-SILICON CAR--ETC(U)

JAN 80 R F DAVIS

N00014-79-C-0121

UNCLASSIFIED

NL

[ CP ]

DA  
10/20/10-10-10




END  
DATE  
FILMED  
4-80  
DTIC



SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

## REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS  
BEFORE COMPLETING FORM

1. REPORT NUMBER 243-027-001	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Single Crystal Epitaxy and Characterization of B-SiC Silicon Carbide		5. TYPE OF REPORT & PERIOD COVERED Annual Report 1 Jan 79 - 31 Dec 79
7. AUTHOR(s) R. F. Davis ↓ (10) Robert [Divis]		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Engineering Research Services Division North Carolina State University, Burlington Labs Raleigh, NC 27650		8. CONTRACT OR GRANT NUMBER(s) N00014-79-C-0121
11. CONTROLLING OFFICE NAME AND ADDRESS ONR-427 Arlington, VA 22217		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS PE 61153N RR 021-02-03 NR 243-027
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE January 25, 1980
15. SECURITY CLASS. (of this report) Unclassified		13. NUMBER OF PAGES 12/52
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES ONR Scientific Officer; Tel: (202) 696-4218		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Silicon Carbide Crystal Growth Vapor Phase Epitaxy New 411651		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The project involves the development of low pressure chemical vapor deposition and r-f sputtering techniques for the synthesis of single crystal thin films of B-SiC. The CVD apparatus is being produced in-house and a detailed description of the design is provided herein. Theoretical CVD phase diagrams of the Si-C-H system are also being produced as a function of Si/SiC and total pressure. Both reactive sputtering of Si in CH <sub>4</sub> and normal sputtering of a SiC target are being readied.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE  
S/N 0102-014-6601

Enclosure (1)

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

80 3 18 005

Annual Technical Report #243-027-001  
on  
SINGLE CRYSTAL EPITAXY AND CHARACTERIZATION OF  
BETA SILICON CARBIDE

Supported by ONR under  
Contract N00014-79-C-0121  
January, 1980

Submitted by  
Robert F. Davis, Principal Investigator  
Engineering Research Services Division  
North Carolina State University  
Raleigh, North Carolina 27650

Approved for public release; distribution unlimited

Reproduction, in whole or in part, is permitted for any purpose  
of the U. S. Government.

Accession for	
NTIS GAKI	
DDC TAB	
Unannounced	
Classification	
FY	
Distribution/	
Availability Codes	
Dist	Availability/
special	special

## I. Introduction

Silicon carbide is the only compound species that exists in the solid state in the Si-C system and can occur in the cubic (C), hexagonal (H) or rhombohedral (R) structures. It is also classified as existing in the beta and alpha modifications. The beta, or cubic, form crystallizes in the zincblende or sphalerite structure; whereas, a large number (approximately 140) of the alpha occur in the hexagonal or rhombohedral forms known as polytypes. At one time it was thought that the beta modification was thermodynamically stable at low temperatures and that it transformed irreversibly to one or several of the alpha forms by a solid state phase transformation at about 2100°C.<sup>1</sup> Above this temperature the alpha modification was considered stable. However, later efforts by Ryan, et al.<sup>2</sup> and other international groups involved in thin film growth have shown that a relatively moderate excess pressure (~ 10 atm.), especially of N<sub>2</sub>, favors the growth of  $\beta$  at all temperatures. Indeed, under certain conditions, the transformation is completely reversible. Impurities, defects, temperature, Si evaporation and ambient gas appear to influence not only the transformation but the resulting polytype as well. This, coupled with small differences in stacking fault energies among the various forms, makes reproducible growth of thin films difficult unless considerable precautions are taken.

Because of the emerging need for high temperature, high frequency and high power electric devices, blue L.E.D.s, Schottky diodes, U.V. radiation detectors, high temperature photocells and heterojunction devices, silicon carbide is being increasingly examined throughout the world for employment as a candidate material in these specialized applications. The electron Hall mobility of high purity undoped  $\beta$ -SiC is approximately a factor of three larger (~ 1000 cm<sup>2</sup>/v-sec) than that of the  $\alpha$ -form over the temperature range of 300-1000K because of the smaller amount of phonon scattering in the cubic material. The energy gap is also less in the  $\beta$  form (2.3 eV) compared to the  $\alpha$ -forms (e.g., 6H = 2.86 eV). Thus, the  $\beta$ -form is now considered more desirable for electronic device applications, and, therefore, the growth of thin films of this material constitutes the principle

objective of this research program. Unfortunately, the earlier push in the 1956-1970 time span to develop SiC as an electronic material concentrated heavily on high temperature growth processes such as the Lely sublimation-condensation technique which produced a variety of  $\alpha$  polytypes in experiments which were rarely reproducible. Toward the end of this initial thrust, techniques such as chemical vapor deposition (CVD), sputtering, traveling solvent and solution growth showed promise not only as techniques per se but as experimental avenues wherein the growth of  $\beta$ -SiC could be achieved.

The objective of the present research program is to capitalize on and extend the knowledge of the CVD and sputtering processes that were discerned not only in the brief initial efforts with SiC, but that have also been developed for these processes in the intervening years in research on other semiconductor materials. Although the actual experimental portion of the effort is still awaiting delivery of several components,\* considerable progress has been made in terms of design of the CVD equipment and the computer-aided production of CVD phase diagrams. A sputtering unit has arrived just prior to this writing and the peripheral equipment for this unit is being installed as it is received. The details of these efforts are reported below.

## II. Chemical Vapor Deposition

### A. Background

Chemical vapor deposition is a material synthesis method in which the constituents of the vapor phase react to form a solid film at some surface. Typical gas combinations which have been employed in the growth of SiC are  $\text{CCl}_4$  and  $\text{SiCl}_4$ ,  $\text{SiH}_4$  and  $\text{C}_3\text{H}_8$ ,  $\text{SiCl}_4$  and  $\text{C}_6\text{H}_{14}$  and  $\text{CH}_3\text{SiCl}_3$  alone. In private communications, Ryan<sup>3</sup> has informed the principal investigator that a small amount of HCl is desired to etch away the areas of poor growth which begin on the substrate.

---

\*The recent tremendous surge in semiconductor manufacturing by all common techniques has generated order backlogs for equipment and parts having waiting periods of up to six months, even for most favored customers.

The reaction in the vicinity of the heated substrate has been shown to vary according to the type of source species and ambient gas.<sup>4, 5</sup> Gatos and co-workers<sup>6</sup> have analyzed the equilibrium partial pressures in the hydrogen-silicon-carbon system and concluded that the efficiency of SiC formation decreases with 1) increasing temperature ( $\geq 1650^{\circ}\text{C}$ ) which causes decomposition and loss of Si and 2) a decreasing silicon-to-carbon ratio in the gas mixture. The epitaxial growth from a silane and propane mixture was found by these researchers<sup>6</sup> to be linearly dependent on the silane pressure for a given temperature and propane input which suggests that Si mobility and concentration at the substrate controls growth. As noted above, Mogab and Leamy<sup>7</sup> found similar results in their studies of the reactions of hydrocarbons with silicon single crystal surfaces. The kinetics research of the present writer has also shown that Si is a much slower diffusing species than C and should control growth where mobility across surfaces is of importance. Finally Gatos et al.<sup>6</sup> have reported that the SiC growth process is best described by an adsorption-desorption process and must be carried out in an atmosphere having a Si/C ratio of 1/1 or larger if the simultaneous deposition of graphite and SiC is to be avoided. These findings are similar to those of Brander.<sup>4, 8</sup>

In order to understand CVD processes, one should know which chemical reactions occur in the reactor and to what extent. Furthermore, the effects of process variables such as temperature, input concentrations and flow rates on these reactions must be understood. The approaches taken to date to discern the aforementioned variables have been 1) visits and discussions with various former and present investigators in the CVD field, 2) design of the experimental apparatus to be used in the present work and 3) development via computer of CVD phase diagrams. Visits to C. Ryan and co-workers at Rome Air Defense Command, Berkman and co-workers at RCA, several laboratories in California and the International CVD Conference in October of 1979 have been invaluable in the development of the design of the CVD process, the determination of the pertinent equipment for each major section and the handling of toxic and flammable gases. Also, these visits have reinforced the ideas espoused much earlier by workers in the SiC growth field concerning the importance of careful control of temperature, gas composition and flow rate and the maintenance of very low levels of impurities.

## B. CVD Phase Diagram

As the design of the CVD system evolved, it became obvious that more information was needed in terms of the solid reaction products which would occur under prescribed conditions of concentrations of certain reactant gases, pressure and temperature. Our research has revealed that numerous methods have been reported for computing thermodynamic equilibrium compositions and that essentially all the techniques have been based on the methods of either Brinkley (9, 10) or White, et al. (11). The former requires the writing of a series of chemical reactions and the computation of their respective equilibrium constants; whereas, the latter involves minimizing the summation of the free energies of all species. Eriksson (12) has extended White et al.'s method to include systems containing more than one condensed phase and has developed a computer program, SOLGAS, for performing the calculations. He has modified the program (13, 14) to be SOLGASMIX so that condensed solution phases could also be considered. To prevent the omission of an important species, the programs can consider all conceivable gaseous species and condensed phases of invariant or variable stoichiometry and mixtures at constant total pressure and temperature in a single calculation. Unstable condensed phases are rejected from the calculation. This program can also handle non-ideal phases, provided activity coefficient relationships are available. Finally, Bessman and Spear<sup>15a, b</sup> have produced a new version of the program (SOLGASMIX-PV) incorporating the ideal gas law. This last version is now capable of calculating equilibria at a constant total gas volume with variable total pressure. These investigators have kindly provided these programs and helpful suggestions for use in developing CVD phase diagrams in this SiC research. A listing of the programs as used in our research are given in Appendix I.

In developing CVD phase diagrams, thermodynamic calculations using CVD variables can be used to show the ranges of input conditions for a CVD system which will produce a specific condensed phase(s) and phase boundaries at equilibrium. In our particular employment of these CVD programs, all conceivable gaseous species are included with the condensed phases in calculating the equilibrium composition of the system as a systematic function of the CVD variables of temperature, total pressure and reactant concentrations.



Both  $\alpha$ -SiC and  $\beta$ -SiC are included in our calculations. In each calculation, one of the variables is changed while all other variables are held constant at an arbitrary set of "standard values." These standard values are typically chosen near the mid-range of the experimental controls, so the desired condensed phase is deposited when all variables are fixed at their respective standard value.

In our present calculations, the elements Si, C and  $H_2$  are the principal species, since  $SiH_4$  and  $CH_4$  are the reactant gases and  $H_2$  is the carrier gas. The type of substrate becomes important only if it emits a gaseous species or enters the reaction upon the formation of the condensed phase or causes structural rearrangement of the solid products. Although this aspect of the research is in its initial stages, one of the important diagrams developed thus far for the Si-C-H system at one atmosphere pressure is presented in Figure 1. An inert substrate is assumed. The Si/Si+C mole ratio depends on not only the fixed input gas ratio, but also on how much SiC is deposited. The same is true for the amount of  $H_2$  in the system. Therefore, a maximum of three phases (a gas phase and two condensed phases) can exist in equilibrium at any given temperature.

The resulting diagram of Figure 1 reveals that above 1000K (the lowest temperature yet examined,  $\beta$ -SiC has a negative standard free energy of formation and the amount that forms as a single phase to the left of the Si/Si + C = 0.5 point occurs over a varying range of these ratios which is a direct function of the amount of  $H_2$  present. At all other ratios or temperatures, solid free C or Si also deposit or Si becomes a liquid. It should be kept in mind that a positive  $\Delta G_f$  for  $\alpha$ -SiC does not mean that it will not form (especially if  $\alpha$ -SiC single crystals were used as a substrate) only that it is slightly less thermodynamically preferable than  $\beta$ -SiC under the given conditions. Since the thermal decomposition of  $SiH_4$  is essentially complete at temperatures greater than 1000°K, the effect of adding  $H_2$  to the system is to promote the reaction with excess carbon atoms to produce various gaseous hydrocarbon species and thus provide for the formation of  $\beta$ -SiC over a wide range of Si/Si+C ratios less than 0.5.

$\text{SiH}_4 + \text{CH}_4 = 1.0 \text{ mole}$

①  $\text{H}_2 = 0 \text{ mole}$

②  $\text{H}_2 = 10 \text{ moles}$

③  $\text{H}_2 = 20 \text{ moles}$

④  $\text{H}_2 = 50 \text{ moles}$

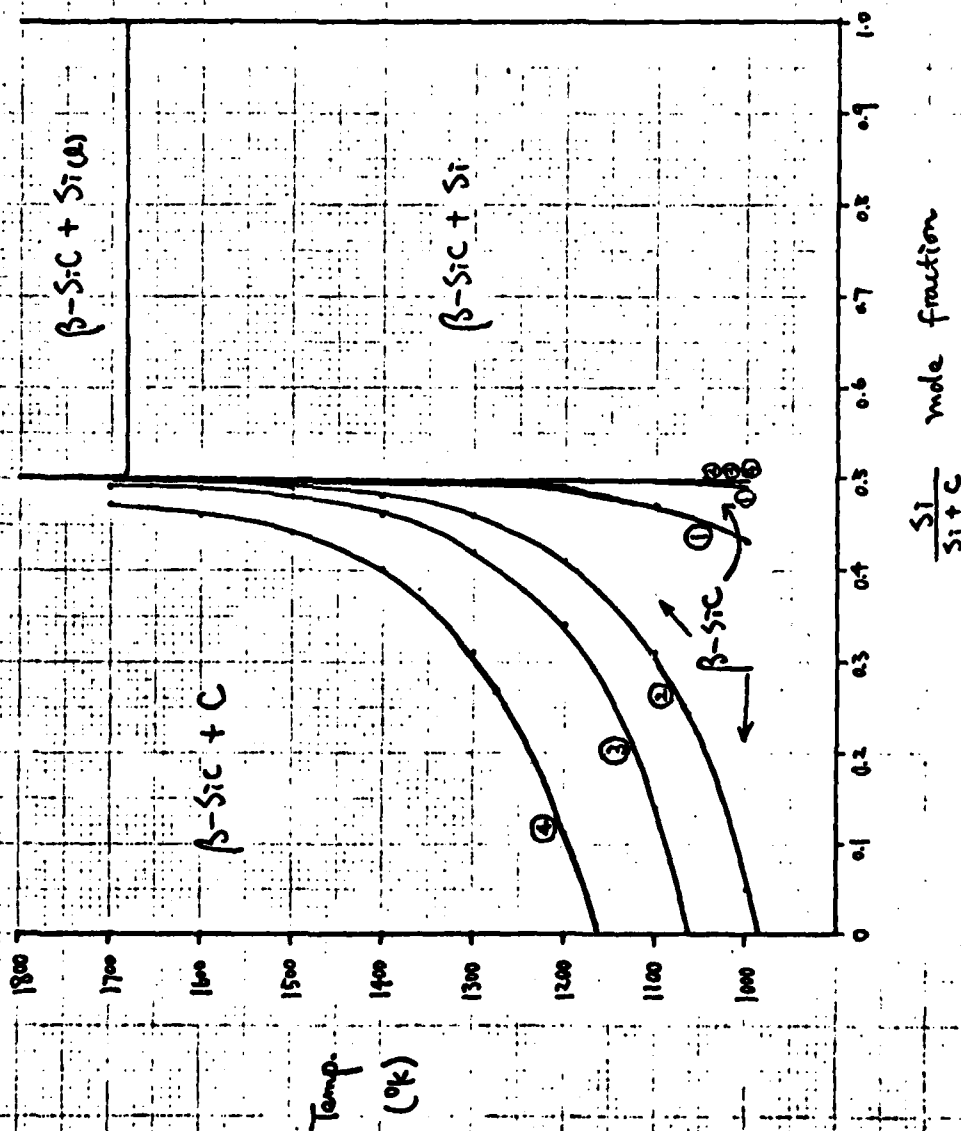


Figure 1. CVD Phase Diagram of Si-C-H System at one Atmosphere Pressure

It has been reported by Ban<sup>16</sup> that more than 80% of the  $\text{SiH}_4$  in a 2%  $\text{SiH}_4$  mixture in  $\text{H}_2$  is decomposed at  $T > 1073\text{K}$ . Thus, at lower concentrations of  $\text{H}_2$ , even greater decomposition is to be expected. Based on our calculations, almost all  $\text{SiH}_4$  should be decomposed under equilibrium conditions. Furthermore, the higher the temperature, the greater will be the decomposition of  $\text{CH}_4$ . As noted above, the pressure of  $\text{H}_2$  will react with the C and thus provide considerable process control.

Finally it should be noted that diagrams were also derived using Ar at one atmosphere in lieu of  $\text{H}_2$  from the foregoing discussion, the phase field of  $\beta\text{-SiC}$  is essentially that labeled (1) in Figure 1, as there is no species to react with the free carbon.

The next calculations will entail going to reduced pressures in order to determine any changes in amount of  $\beta\text{-SiC}$  that will form. Preliminary research at  $10^{-3}$  atm without the presence of  $\text{H}_2$  indicates the formation of  $\beta\text{-SiC}$  only at a ratio of  $\text{Si}/\text{Si}+\text{C}$  of 0.5 until approximately 1550K where the region widens rapidly toward the lower ratios as temperature is increased. These investigations will continue throughout the next year.

#### C. Design of the CVD System

At normal atmospheric pressure, the rates of mass transfer to the gaseous reactant and by product species and the surface reactant rate to form the film deposit are generally of the same order of magnitude. Therefore, in order to attain the objective of uniform film thickness and properties over a surface, it is necessary to ensure that careful consideration be given to both types of rate determining steps. Mass transfer rates depend mainly upon reactant concentration, diffusivity and boundary layer thickness which is related to reactor configuration, flow velocity, distances from edges, etc. Surface reaction rates, however, depend mainly upon reactant concentration and temperature.

The diffusivity of a gas is inversely related to pressure. Therefore, as pressure inside the reactor is lowered from one atmosphere to 0.5-1.0 torr, the diffusivity increases by a factor of 1000. This is only partially offset by the fact that the laminar boundary layer (distance across which the reactants must diffuse) increases at less than the square root of the pressure.

The net effect is more than one order of magnitude increase of the gas phase transfer of reactants to and by-products from the substrate surface, and the rate-determining step in the sequence is the surface reaction. Therefore, in such a low-pressure operation (LPCVD), much less attention need be paid to the mass transfer variables that are so critical at atmospheric pressure.

An additional advantage of LPCVD is the considerable reduction in autodoping from gaseous species derived from the substrate material. In CVD processes at one atmosphere, the laminar portion of the boundary layer next to the sample is very narrow. As such, any species diffusing out of the substrate enters this narrow layer and has a relatively high probability of returning to surface of the material, being deposited and becoming incorporated into this deposit. For these reasons, an LPCVD system has been designed as shown in Figures 2-5 and described below. Because this system is and will be continually in the process of evolution even after the completion of the initial "best" arrangement, the author has chosen to present the figures in an unfinished form rather than to take several days to make engineering drawings. The latter will be produced for that arrangement which will be found to be optimum.

As shown in Figure 2, the principal reactant gases are methane ( $\text{CH}_4$ ) and silane ( $\text{SiH}_4$ ) with a carrier gas of  $\text{H}_2$ . Although all gases will be of highest available purity ( $\text{H}_2$  will be purified "in-house" using a Pd/Ag cell),  $\text{CH}_4$  and  $\text{H}_2$  will also be "scrubbed" to remove any residual oxygen and  $\text{H}_2\text{O}$  which could react with  $\text{SiH}_4$  to form  $\text{SiO}_2$ . In addition, crosspurge assemblies will be employed to eliminate impurity capture during tank exchange.  $\text{HCl}$  will be used to clean the single crystal Si substrates and to etch away any excess Si from the SiC during growth. Stainless steel tubing, specially cleaned for chromatographic experiments, will be used throughout the system. An MKS electronic system will be used to control the flow of each of the gases in the system. The flow of the carrier gas (when used) will be set at a particular value and  $\text{SiH}_4$  and  $\text{CH}_4$  slaved to this value in a particular ratio.  $\text{HCl}$  will have an independent flow controller, since 1) the operator may desire to vary the amount of etch used for the Si and SiC, respectively, and 2) the MKS unit can handle only three gases. The flow rate of each gas (except  $\text{HCl}$ ) will be measured by a Tylan flow meter which returns a signal to the MKS unit which, in turn, compares

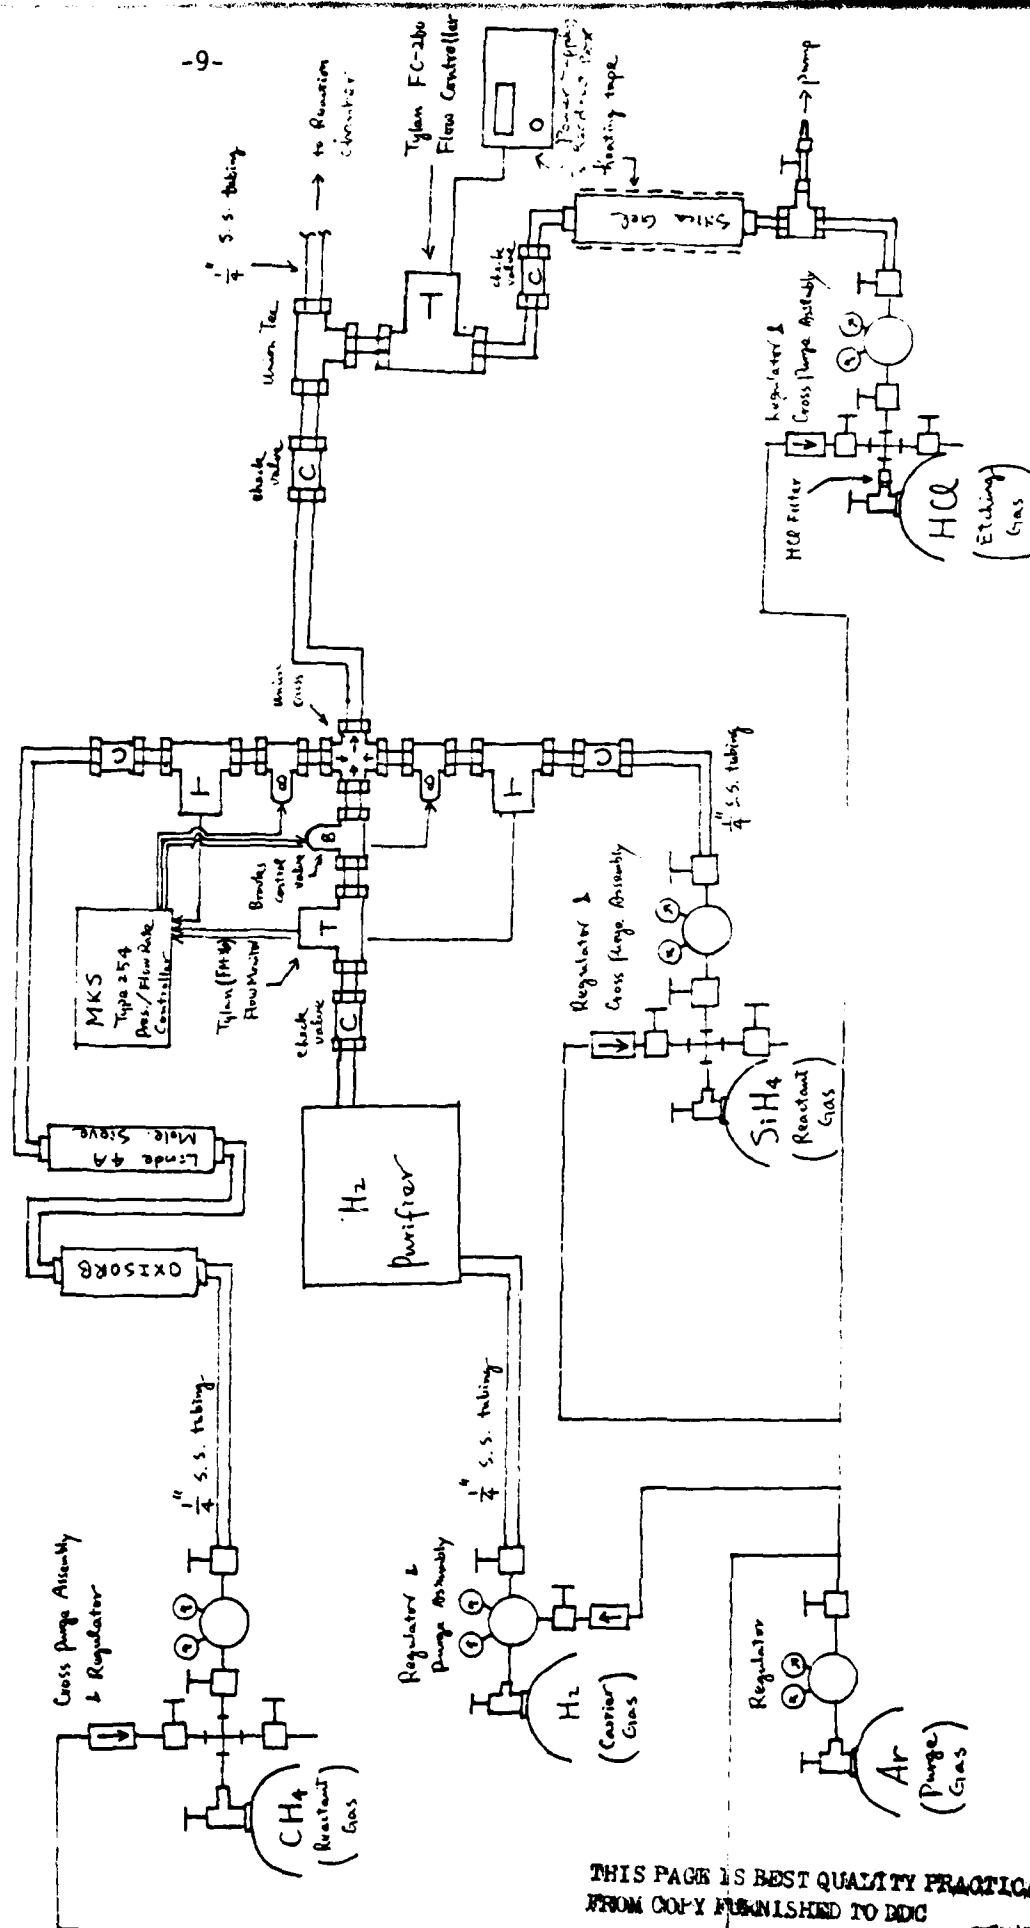


Figure 2. Schematic of Gas Flow, Monitoring and Regulation for CVD System

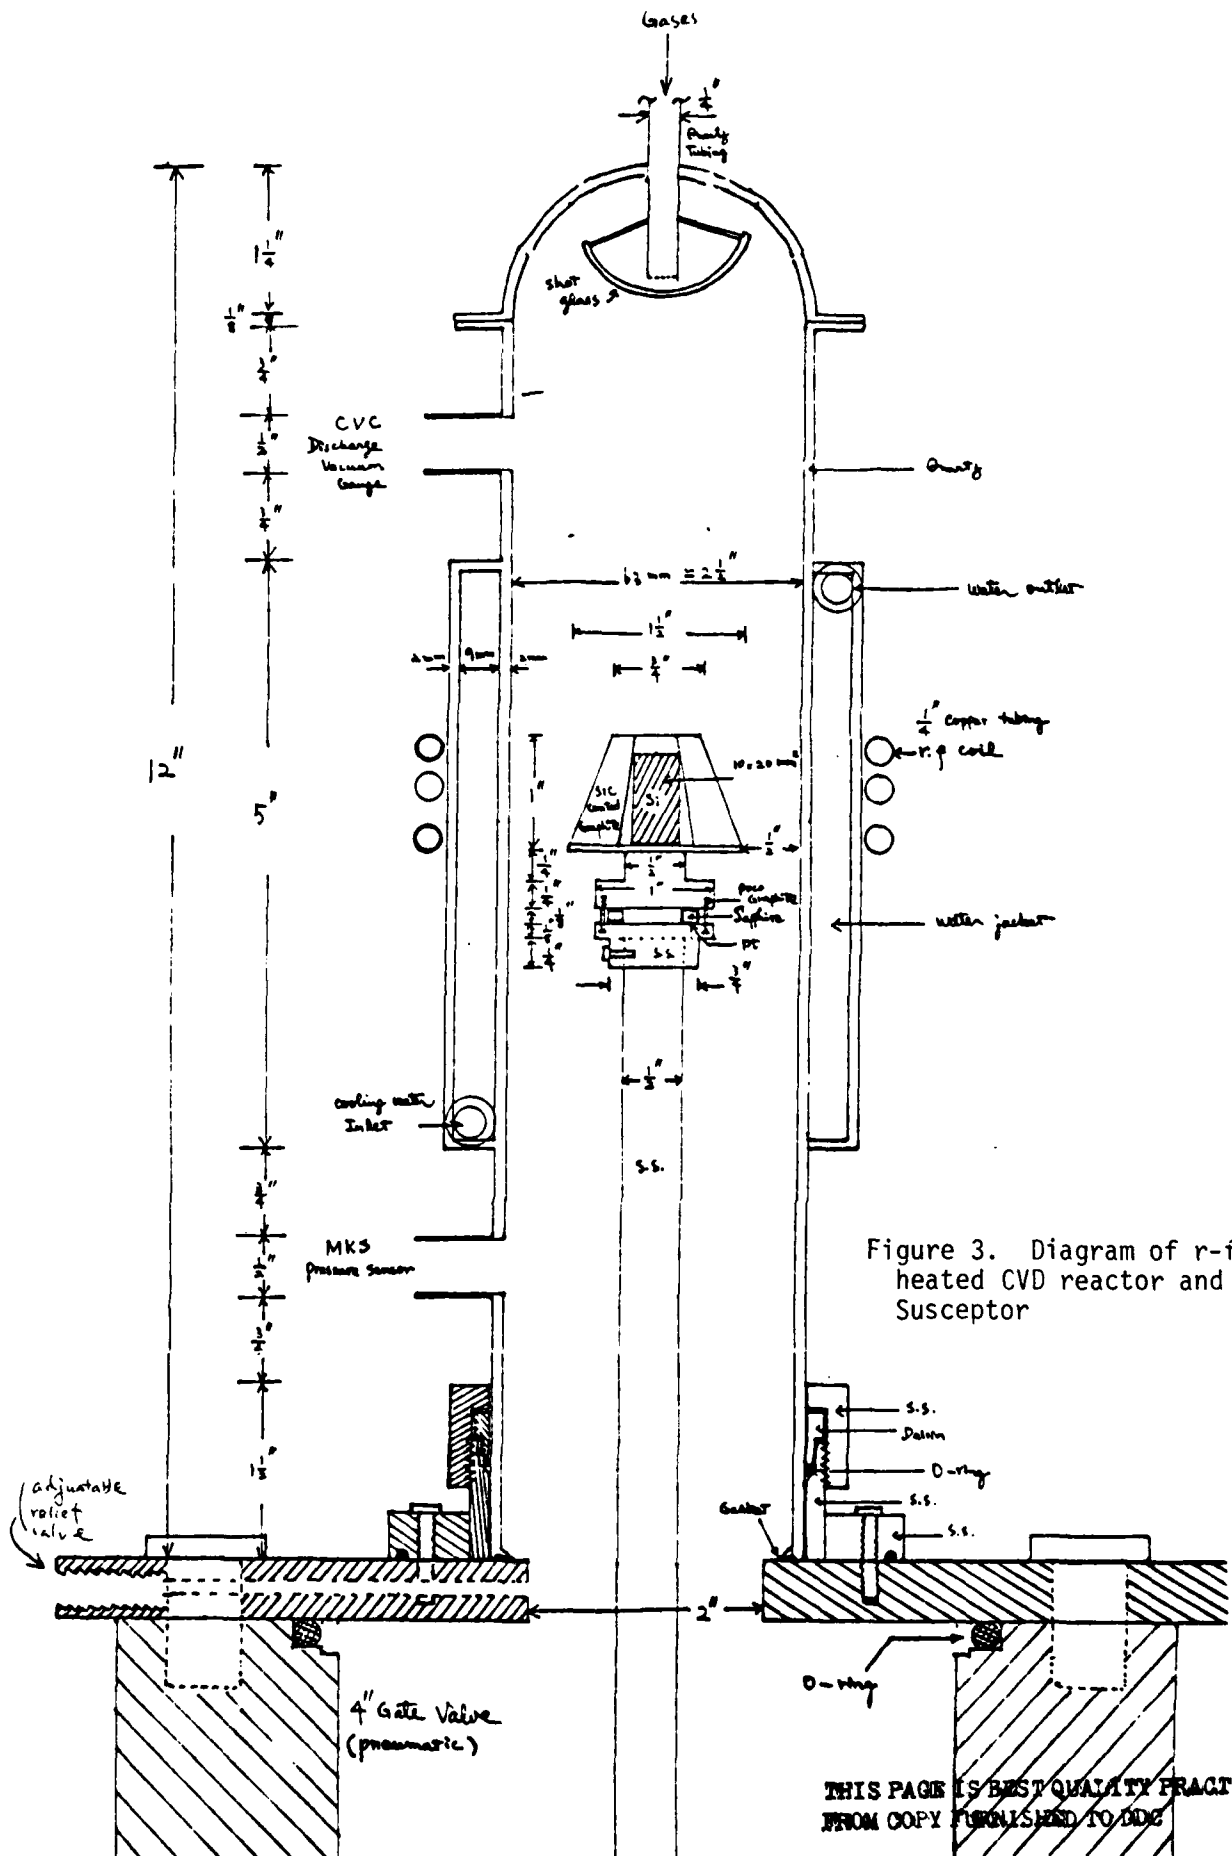


Figure 3. Diagram of r-f heated CVD reactor and Susceptor

THIS PAGE IS BEST QUALITY PRACTICABLE FROM COPY FURNISHED TO DDC

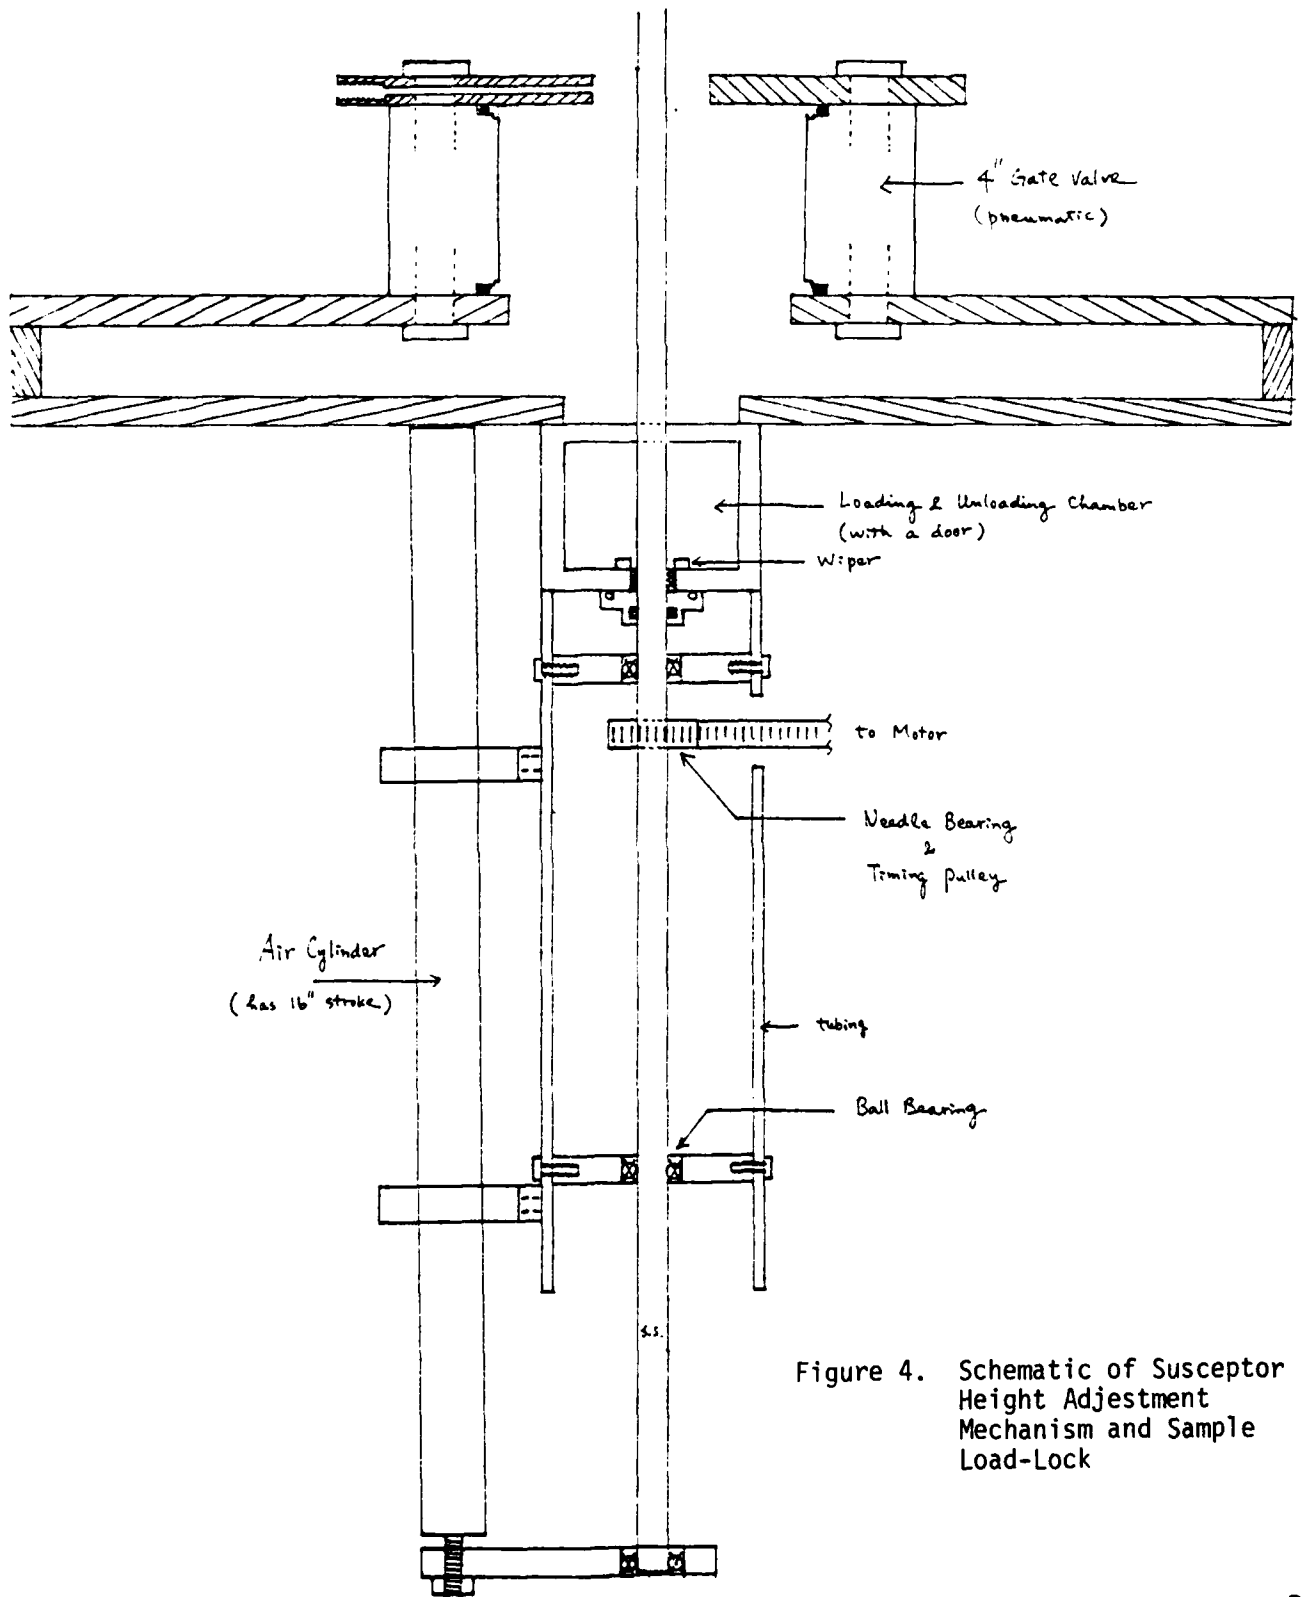


Figure 4. Schematic of Susceptor Height Adjustment Mechanism and Sample Load-Lock

THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM U.S. GOVERNMENT PRINTING OFFICE

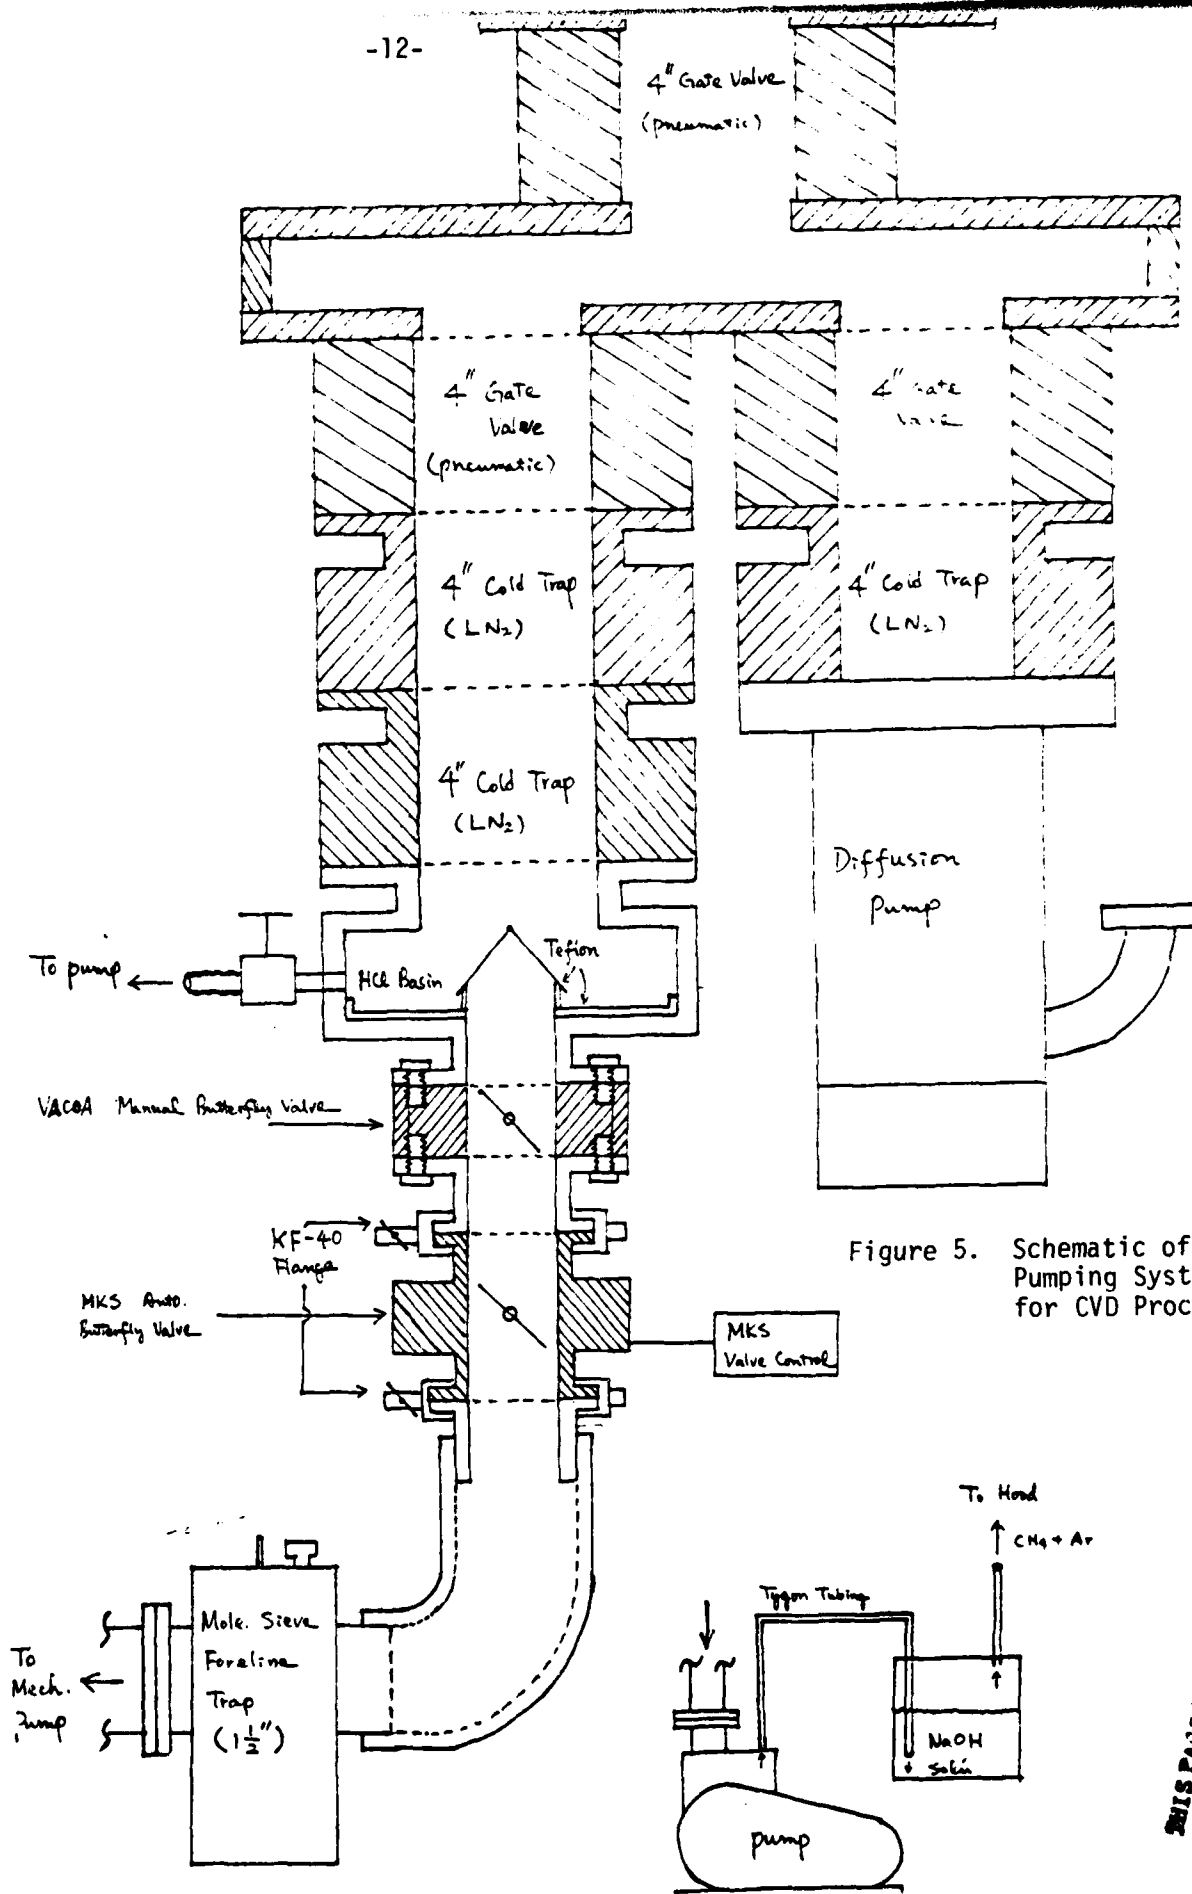


Figure 5. Schematic of Pumping Systems for CVD Process

THIS PAGE IS BEST QUALITY PRACTICABLE FROM COPY FURNISHED TO IDG



this signal with the electrical setpoints established by the operator and adjusts the Brooks electronic valves, if the desired and the actual flow rates are different. Check valves will be employed in each line to prevent contamination of the lines and gas bottles. In addition, argon-operated bellows sealed valves (not shown) will be employed as an insurance measure against the possible closure failure of the Brooks valves and to establish the initial flow conditions of all gases before they enter the main chamber. In the latter process the gases are first vented to the mechanically pumped side of the reaction chamber; when set flow rates are established, the supply is immediately switched to the already heated chamber.

The chamber, Figure 3, is composed of a water (or He) cooled, vacuum tight quartz chamber mounted on a stainless steel plate. Gas entering the chamber will be deflected to the hemispherical cap to produce a more evenly distributed flow, additional mixing and additional path length for the establishment of equilibrium flow patterns. The r-f heated, barrel type susceptor will be a nominally hexagonal, high purity SiC-coated carbon device supported by a high purity Poco graphite assembly and a stainless steel rod attached to a hydraulic and motorized assembly, Figure 4, which will provide the capability of rotation and vertical movement of the susceptor. The latter motion will allow a change of samples in a loading chamber, Figure 4, without exposing the fused quartz chamber to air. Pressure in the chamber will be measured by a capacitance manometer which has a feedback and control loop through a second MKS controller to an automatic butterfly valve, Figure 5; thus, control of flow and pressure will be independent of each other. Temperature will be measured initially by an optical pyrometer; however, other methods are being explored. As indicated above, the initial substrates will be high purity float zone, n-type Si single crystal wafers having resistivities in the range of 240-400  $\Omega$ -cm. Both (100) and (111) wafers, previously etched and polished, in order to compare the effect of substrate orientation on the efficacy of deposition will be employed.

As shown in Figures 3, 4 and 5, a set of three gate valves will be used to isolate the various parts of the reaction and pumping sections.

The diffusion-pumped side will be used to evacuate the total system and to differentially pump an RGA (not shown). The other pumping assembly includes two cold traps to freeze HCl before it reaches the automatic valve and mechanical pump. (There is some concern that  $\text{SiH}_4$  may also be frozen out to dangerous concentrations; thus, this aspect of the procedure will be closely monitored.) The HCl basin has been replaced by a particle trap located above the first cold trap. The upper manual butterfly valve allows a larger opening in the automatic valve and therefore closer control of the pressure. A molecular sieve is also included to prevent mechanical pump oil from backstreaming into the valves and traps.

In conclusion, this system has evolved around the investigators' needs for very tight control on flow rates, pressure, temperature and purity. Numerous people at laboratories around the world have discussed their experiences and offered suggestions on CVD design; many of these ideas are included in these drawings. It will continue to evolve until the objective of the reproducible production of single crystal  $\beta$ -SiC thin films is attained.

### III. R. F. Sputtering

An alternative method of depositing SiC is via r-f glow discharge sputtering. In this process the target plate of material to be deposited directly or reacted with a gas to produce a synthesized film is connected to a negative r-f voltage supply. The substrate and holder face the target and the former may be biased, heated, cooled or some combination of these. A gas, usually Ar, is subsequently introduced as a medium in which a glow discharge can be initiated and maintained. As a result of the plasma, positive ions strike the target plate and remove principally neutral target atoms by momentum transfer, and these condense into thin films.

Two approaches are planned at this point: 1) reactive sputtering wherein a high purity Si substrate is sputtered in a reactive gas of methane and Si and C species combine on a heated substrate to form SiC and 2) direct diode sputtering of a high purity SiC target onto a cooled or heated substrate. It should be noted that in the first approach the Si target may become conditioned with C such that a thin layer of SiC is produced and the process approach that of the second method.

Reactive sputtering<sup>17-20</sup> or sputtering of a target of the composition of the desired epitaxially grown crystal have produced reasonably good films of  $\beta$ -SiC. Wasa *et al.*,<sup>17</sup> have prepared both amorphous and polycrystalline  $\alpha$ -SiC films by sputtering one inch pressed disks of  $\alpha$  and  $\beta$ -SiC of approximately 99.7% purity onto substrates of glass, sapphire and (111) silicon. The polycrystalline films were only formed when the substrates (except glass) were heated to  $\geq 700^\circ\text{C}$ . The most interesting aspect of this research was that the deposited  $\alpha$ -SiC transformed to  $\beta$ -SiC during annealing in vacuum at  $1100^\circ\text{C}$  for one hour. Berman *et al.*,<sup>18</sup> have also reported a method of converting amorphous SiC into crystalline SiC by annealing at high temperature. They also used pressed disks of  $\alpha$ -SiC as the target for sputtering. The reported electron diffraction patterns taken in reflection appeared to include polycrystalline rings. Learn and Haq<sup>19</sup> investigated the preparation of single-crystalline films of  $\beta$ -SiC on  $\alpha$ -SiC substrates by reactive sputtering in acetylene gas using elemental Si as the target material. Finally, Nishino *et al.*,<sup>20</sup> have produced their own  $\beta$ -SiC target from crystals etched from a silicon solution and ground into powder. A (111) silicon wafer was again used as the substrate and heated to  $1000^\circ\text{C}$  and above. These investigators concluded that the substrate temperature should be kept at around  $1200^\circ\text{C}$  to obtain good single crystal coatings. The sputtered films were oriented in the same [111] direction as the silicon face.

In our own work, we are currently modifying rather extensively and upgrading an older sputtering unit. Feedback flow and pressure controls similar to that employed in the LPCVD work will also be used in the remodeled sputtering system. We are currently awaiting arrival of spare parts, new equipment and targets.

### Bibliography

1. H. Jagodzinski and H. Arnold in Silicon Carbide - a High Temperature Semiconductor, Pergamon Press, N. Y., pp. 136-146.
2. C. E. Ryan, R. C. Marshall, J. J. Hawley, I. Berman and D. P. Connors, A-FCRL-67-0436, Physical Sciences Research Paper 436.
3. C. E. Ryan, private communication.
4. R. W. Brander, Silicon Carbide 1973, p. 8 (1974).
5. J. M. Harris, H. C. Gatos and A. F. Witt, J. Electrochem. Soc. 116, 672 (1969).
6. B. Wessels, H. C. Gatos and A. F. Witt, Silicon Carbide, 1973 p. 25 (1974).
7. C. J. Mogab and H. J. Leamy, Silicon Carbide, 1973 p. 58 (1974).
8. R. W. Brander and R. P. Sutton, J. Phys. D. 2, 309 (1969).
9. S. R. Brinkley, Jr., J. Chem. Phys. 14, 563 (1946).
10. S. R. Brinkley, Jr., Ibid. 15, 107 (1947).
11. W. B. White, W. M. Johnson and G. B. Dantzig, Ibid. 28, 751 (1958).
12. G. Eriksson, Acta Chem. Scand. 25, 2651 (1971).
13. G. Eriksson and E. Rosen, Chemica Scripta, 4 193 (1973).
14. G. Eriksson, Ibid. 8, 100 (1975).
- 15a. T. M. Bessman and K. E. Spear, J. Electrochem. Soc. 124, 790 (1977).
- b. K. E. Spear, "Proced. 7th Int. Conf. on CVD, 1979," Ed. by T. O. Sedgwick and H. Lydtin, the Electrochemical Soc., p. 1 (1979).
16. V. S. Ban, "Proced. 6th Int. Conf. on CVD, 1977," Ed. by L. F. Donaghey, P. Rai-Choudhury and R. N. Tauber, the Electrochem. Soc., p. 66 (1977).
17. K. Wasa, T. Nagai and S. Hayakawa, Thin Sol. Films 31, 325 (1976).
18. I. Berman, R. C. Marshall and C. E. Ryan, Silicon Carbide, 1973, pp. 42 and 593 (1974).
- 19a. A. J. Learn and K. E. Haq, J. Appl. Phys. 40, 430 (1969).
- b. A. J. Learn and K. E. Haq, Appl. Phys. Lett. 17, 26 (1970).
20. S. Nishino, H. Matsunami, M. Odaka and T. Tanka, Thin Solid Films 40, L27 (1977).

APPENDIX I. SOLGASMIX-PV LISTING

••FTN, L, L, B, C.

C  
C  
C  
C  
C  
C  
C

\*\*\* SOLGASMIX-PV \*\*\*

C CALCULATES EQUILIBRIA AT CONSTANT PRESSURE OR VOLUME. THE PROGRAM IS A  
C MODIFICATION OF SOLGASMIX (G. ERICSSON, CHEMICA SCRIPTA., 8 (1975) 100).

```

      IMPLICIT REAL*8 (A-H,O-Z)
      COMMON A(99,10), AO(99,10), AKT(99), AKTP(99), B(10,99), BO(10),
      $G(99), KH(20), L, M, H1, HA, HB, HP(20), HL(20), MP, MS, NO(99),
      SWP, EI(20), PTOT, T, TEXT(99), Y(99), YP(99), YTOT(20), V, NV, NVV
      DIMENSION PEF(99), GE(99,6), HF(99), IEL(10), IPH(15), IGT(6),
      SIOK(99), XI(99), TITLE(10), EL(10), GI(99,6)
      H = DLOG(10.)
      IN=5
      IOUT=6
      HP(1) = 1
26  PTOT = 1.
      DO 48 K = 1, 20
48  KH(K) = 0
      READ (IN,240) (TITLE(I), I=1, 10)
240  FORMAT (10A8)
      WRITE (IOUT,230) (TITLE(I), I=1, 10)
230  FORMAT ('1',20X,10A8)
      READ (IN,102) L, MP, HB, (HL(M), M = 1, MP)
102  FORMAT (40I2)
      WRITE (IOUT,250) L, MP, HB, (HL(M), M=1, MP)
250  FORMAT ('ONO. OF ELEMENTS = ',I2,5X,'NO. OF MIXTURES = ',I2,5X,
      '1'NO. OF INVARIANT SOLIDS = ',I2/, 'ONO. OF SPECIES PER MIXTURE = ',
      210(I2,', '))
      IF (MP.EQ. 1) GO TO 146
      DO 132 M = 2, MP
      HP(M) = HL(M-1) + 1
132  HL(M) = HL(M-1) + HL(M)
146  H1 = HL(MP) + 1
      MS = HL(MP) + MR
      READ (IN,260) (ZL(I), I=1, L)
260  FORMAT (10A8)
      DO 33 I = 1, MS
      XI(I) = 0.
      READ (IN,280) (A(I,J), J=1, L)
280  FORMAT (16F5.0)
      DO 33 J = 1, L
      33  AO(I,J) = A(I,J)
      READ (IN,200) NV, V
200  FORMAT (I1,9X,E10.0)
      READ (IN,102) (IEL(J), J = 1, L)
      READ (IN,102) HGT, HOK
      IF (HGT.GT. 0) GO TO 14

```

```

      IF (NOK .GT. 0) READ (IN,102) (IOK(N), N = 1, NOK)
      DO 255 I=1,MS
255  READ (IN,270) TEXT(I),HF(I)
270  FORMAT (A8,2X,7E10.3)
      GO TO 310
: 14  READ (IN,102) (IGT(N), N = 1, MGT)
      DO 265 I=1,MS
265  READ (IN,270) TEXT(I), (GE(I,N), N=1,MGT)
      DO 266 I=1,MS
      DO 267 N=1,6
267  GY(I,N)=0.
      DO 266 N=1,MGT
266  GY(I,IGT(N))=GE(I,N)
      WRITE (IOUT,300) (TEXT(I), (GY(I,N), N=1,6 ), I=1,MS)
300  FORMAT ('0SPECIES',6X,'A',14X,'B',14X,'C',14X,'D',14X,'E',14X,'F',
1/,99('0',A8,3X,6(E12.5,3X),/))
310  WRITE (IOUT,230) (TITLE(I), I=1,10)
      WRITE (IOUT,340) (EL(I), I=1,L)
340  FORMAT ('0',20X,'SUBSCRIPTS ON ELEMENTAL SYMBOLS OF EACH SPECIES',
1/, '0',18X,10(A8,2X))
      DO 350 I=1,MS
350  WRITE (IOUT,360) TEXT(I), (A(I,J), J=1,L)
360  FORMAT ('0',A8,8X,10(F5.2,5X))
      42  READ (IN,103) T
      WRITE (IOUT,122) T
122  FORMAT (4H0T =, F8.2, 2H K/)
      IF (MGT .EQ. 0) GO TO 82
      DO 84 I = 1, MS
      84  G(I) = 0.
      DO 81 N = 1, MGT
      IF (IGT(N) .LT. 6) TP = T*(IGT(N) - 3)/8.31433
      IF (IGT(N) .EQ. 6) TP = DLOG(T)/8.31433
      DO 81 I = 1, MS
      81  G(I) = G(I) + GE(I,N)*TP
      GO TO 8
      82  DO 49 I = 1, MS
      READ (IN,103) PEF(I)
      49  G(I) = (PEF(I) + 1000.*HF(I)/T)/8.31433
      IF (NOK .EQ. 0) GO TO 4
      DO 23 N = 1, NOK
      I = IOK(N)
      G(I) = -H*PEF(I)
      DO 23 J = 1, L
      K = IEL(J)
      23  G(I) = G(I) + A(I,J)/A(K,J)*G(K)
      4  WRITE (IOUT,230) (TITLE(I), I=1,10)
      WRITE (IOUT,106) (TEXT(I), HF(I), PEF(I), G(I), I = 1, MS)
106  FORMAT (15X, 5HMF298, 8X, 3HPEF, 9X, 4HG/RT/(' ',A8,P12.0,2F12.3))
      GO TO 8
      37  READ (IN,103) PTOT
103  FORMAT (8E10.0)
      8  READ (IN,102) KVAL1
      GO TO (40,40,40,7,34,42,37,85,26,1), KVAL1
      40  READ (IN,102) NPKT
      READ (IN,102) (KH(J), J = 1, L)
      7  DO 164 J = 1, L
      N = KH(J)

```

```

      GO TO (161,162,163,161,162,163), N
161 READ (IN,103) (B(J,N), N = 1, NPRT)
      GO TO 164
162 READ (IN,103) B(J,1)
      IF (NPRT .EQ. 1) GO TO 164
      DO 160 N = 2, NPRT
160 B(J,N) = B(J,1)
      GO TO 164
163 READ (IN,103) B(J,1), STEP
      DO 165 N = 2, NPRT
165 B(J,N) = B(J,N-1) + STEP
164 CONTINUE
      GO TO (35,39,34,34), KVAL1
. 35 DO 370 I=1 NS
370 READ (IN,103) Y(I)
      GO TO 166
      39 BEST = 0.
      DO 169 J = 1, L
      IF (B(J,1) .GT. BEST .AND. KH(J) .LT. 4) BEST = B(J,1)
169 CONTINUE
      BEST = BEST/DFLOAT(NS)
      DO 167 I = 1, NS
167 Y(I) = BEST
166 DO 135 M = 1, MP
      YTOT(M) = 0.
      MA = MY(M)
      MB = ML(M)
      DO 135 I = MA, MB
135 YTOT(M) = YTOT(M) + Y(I)
      34 MP = 0
      27 MP = MP + 1
      DO 75 I = 1, NS
      75 NO(I) = 1
      DO 22 J = 1, L
      BO(J) = B(J,MP)
      I = IEL(J)
      IF (KH(J) .LT. 4) GO TO 170
      PI(J) = (G(I) + M*BO(J))/A(I,J)
      GO TO 22
170 XI(I) = NO(J)/A(I,J)
      IF (IO(J) .NE. 0.) GO TO 22
      DO 30 I = 1, NS
      IF (A(I,J) .EQ. 0.) GO TO 30
      NO(I) = 0
      Y(I) = 0.
      30 CONTINUE
      22 CONTINUE
      CALL GASOL
      WRITE (IOUT,230) (TITLE(I), I=1,10)
      WRITE (IOUT,111) T, PTOT
111 FORMAT (4H0T =, F8.2, 2H K/ 4H P =, 1PE10.3, 4H ATN/)
      IF (NV.EQ.0) GO TO 210
      WRITE (IOUT,220) V
220 FORMAT (4H V =, 1PE10.3, 2H L/)
210 CONTINUE
      IF (M .LE. MP) GO TO 64
      WRITE (IOUT,116)

```

```

118 FORMAT (/50H THE EQUILIBRIUM COMPOSITION HAS NOT BEEN OBTAINED)
      GO TO 28
64 IF (N.EQ. 0) WRITE (IOUT,121)
121 FORMAT (33H THE SMALL Y-VALUES ARE NOT EXACT/)
      DO 17 J = 1, L
      IF (RN(J) .LT. 4) GO TO 17
      K = IEL(J)
      XI(K) = 0.
      DO 50 I = 1, NS
      XI(K) = XI(K) + AO(I,J)*Y(I)
17 CONTINUE
      WRITE (IOUT,105)
105 FORMAT (15X,7HX*/MOLE,8X,6HY/MOLE,10X,5HP/ATM,8X,8HACTIVITY)
      DO 140 M = 1, NP
      IF (M .GT. 1) WRITE (IOUT,125)
125 FORMAT (41X, 13HMOLE FRACTION)
      NA = NP(M)
      NB = NL(M)
      DO 140 I = NA, NB
140 WRITE (IOUT,124) TEXT(I), XI(I), Y(I), YP(I), AKT(I)
124 FORMAT (' ',A8,4(3X,E12.5))
      IF (NR .GT. 0) WRITE (IOUT,120) (TEXT(I), XI(I), Y(I), I = NA, NS)
120 FORMAT (/(' ',A8,2(3X,E12.5)))
      CALL SPEQUA
28 IF (NP - NPKT) 27,8,8
1 STOP
END

```



```

SUBROUTINE GASOL
IMPLICIT REAL*8 (A-H,O-Z)
COMMON A(99,10), AO(99,10), AKT(99), AKTF(99), B(10,99), BU(10),
SG(99), KH(20), L, N, M1, MA, MB, MP(20), ML(20), NP, NS, NO(99),
SNP, PI(20), PTOT, T, TEXT(99), I(99), IP(99), YTOT(20), V, NV, NVV
DIMENSION P(99), IPAS(20), ISOL(20), LX(99), NSUM(500), OPI(10),
SR(20,21), YPTOT(20), YX(99)
MX = 0
171 IS = -1
NSUM = 0
NG = 0
55 ISUM = 0
MSA = 0
IF (MS .LT. M1) GO TO 47
DO 52 J = M1, MS
IF (Y(J) .EQ. 0.) GO TO 52
MSA = MSA + 1
ISOL(MSA) = J
ISUM = ISUM + 2*(I + MP - M1)
52 CONTINUE
47 MPA = 0
NG = NG + 1
IF (NG .EQ. 501) NG = 1
NSUM(NG) = ISUM
YSUM = 0.
DO 152 N = 1, MP
IF (YTOT(N) .EQ. 0.) GO TO 152
MPA = MPA + 1
IPAS(MPA) = N
NSUM(NG) = NSUM(NG) + 2*(N - 1)
YSUM = YSUM + YTOT(N)
152 CONTINUE
IF (NSUM(NG) .GE. IS .AND. MPA + MSA .LE. L) GO TO 69
59 IS = IS + 2
DO 154 N = 1, MPA
N = IPAS(N)
154 YTOT(N) = 0.
ISUM = 0
MPA = 1
YTOT(1) = 1.
IF (MSA .EQ. 0) GO TO 73
DO 68 N = 1, MSA
I = ISOL(N)
68 Y(I) = 0.
MSA = 0
73 IF (IS .EQ. 1) GO TO 74
IT = IS
61 N = 0
71 N = N + 1
IF (2*N .LE. IT) GO TO 71
IF (N .GT. MP) GO TO 57
MPA = MPA + 1
IPAS(MPA) = N
YTOT(N) = 1.
MA = MP(N)

```

```

      MB = ML(M)
      DO 150 I = 1, MA, MB
      IF (NO(I) .EQ. 1) Y(I) = YSUM
150 CONTINUE
      GO TO 136
57  I = N + ML(MF) - MP
      IF (I .GT. MS) RETURN
      IF (NO(I) .EQ. 0) GO TO 59
      NSA = NSA + 1
      ISOL(NSA) = I
      ISUM = ISUM + 2**(N - 1)
      Y(I) = YSUM
136 IT = IT - 2**(M - 1)
      IF (IT .GT. 1) GO TO 61
      IF (MPA + NSA .GT. 1) GO TO 59
74  IPAS(1) = 1
      IF (NSUM(NG) .GT. IS) NG = NG + 1
      IF (NG .EQ. 501) NG = 1
      NSUM(NG) = IS
69  IF (NG .EQ. 1) GO TO 129
      DO 148 K = 2, NG
      IF (NSUM(NG) .EQ. NSUM(K-1)) GO TO 59
148 CONTINUE
      IF (NSUM(NG-1) .EQ. NSUM) NSUM(NG-1) = -NSUM(NG-1)
      IF (NG .LT. 3 .OR. NSUM(NG-2) .NE. -NSUM .OR. NSUM(NG) .EQ. NSUM) GO TO 129
      NSUM(NG-2) = -NSUM(NG-2)
129 DO 142 N = 1, NP
      NA = NP(N)
      NB = NL(N)
      IF (YTOT(N) .GT. 0.) GO TO 130
      DO 126 I = NA, NB
      AKT(I) = 0.
      AKTF(I) = 1.
      Y(I) = 0.
126 YF(I) = 0.
      GO TO 142
130 DO 45 I = NA, NB
      IF (NO(I) .EQ. 1 .AND. Y(I) .LT. 1.E-8) Y(I) = 1.E-8
      AKTF(I) = 1.
45  LX(I) = 0
      CALL ABER
      IF (YTOT(N) .EQ. 0.) GO TO 47
142 CONTINUE
      LS1 = 1 + MPA + NSA
      LS = LS1 - 1
      LS2 = LS + 2
134 DMIN = 1.E-6
      IVAB = 0
      IVARJ = NL(1) - MS
16  DO 6 J = 1, LS1
      DO 6 K = J, LS2
6   R(J,K) = 0.
      DO 9 M = 1, MPA
      L1 = L + M
      R = IPAS(M)
      RA = NP(M)
      RB = NL(M)

```

*Add this  
Card.*

```

DO 5 I = MA, MB
IF (Y(I) .EQ. 0.) GO TO 5
P(I) = G(I) + DLOG(AKT(I))
R(L1,LS2) = R(L1,LS2) + P(I)*Y(I)
DO 77 J = 1, L
IF (A(I,J) .EQ. 0.) GO TO 77
AY = A(I,J)*Y(I)
R(J,L1) = R(J,L1) + AY
R(J,LS2) = R(J,LS2) + AY*P(I)
DO 80 K = J, L
80 P(J,K) = R(J,K) + AY*A(I,K)
77 CONTINUE
5 CONTINUE
DO 9 J = 1, L
9 R(J,LS2) = R(J,LS2) - R(J,L1)
IF (HSA .EQ. 0) GO TO 63
DO 67 M = 1, HSA
I = ISOL(M)
K = 1 + MPA + M
R(K,LS2) = G(I)
DO 67 J = 1, L
67 R(J,K) = A(I,J)
63 DO 31 J = 2, LS1
N = J - 1
DO 31 K = 1, N
31 R(J,K) = R(K,J)
IF (HX .EQ. 0) GO TO 156
DO 131 J = 1, L
131 B0(J) = B(J,MP)
DO 172 M = 1, MPA
M = JFAS(M)
IF (MF(M) .NE. HL(M)) GO TO 172
BA = MF(M)
DO 89 J = 1, L
IF (A(MA,J) .EQ. A0(MA,J)) GO TO 89
AKVOT = (1. - A(MA,J)/A0(MA,J))*Y(MA)
DO 91 K = 1, L
IF (A(MA,K) .EQ. A0(MA,K)) B0(K) = B0(K) + AKVOT*A(MA,K)
91 CONTINUE
GO TO 172
89 CONTINUE
172 CONTINUE
156 DO 44 K = 1, L
IF (KH(K) .LT. 4) GO TO 44
DO 83 J = 1, LS1
83 R(J,LS2) = R(J,LS2) - PI(K)*R(J,K)
44 R(K,LS2) = R(K,LS2) + B0(K)
DO 10 K = 1, LS
IF (KH(K) .GT. 3) GO TO 10
ELMAX = 0.
DO 11 J = K, LS1
IF (ABS(R(J,K)) .LE. ELMAX .OR. KH(J) .GT. 3) GO TO 11
HROW = J
ELMAX = DABS(R(J,K))
11 CONTINUE
IF (ELMAX .GT. 0.) GO TO 36
IF (K .GT. 1 .OR. B0(K) .EQ. 0.) GO TO 10

```

```

GO TC 59
36 IF (NR0V -EQ. K) GO TO 13
DO 15 N = K, LS2
RADBYT = R(NR0V,N)
R(NRCW,N) = B(K,N)
15 B(K,N) = RADBYT
13 KA = K + 1
DO 46 J = KA, LS1
RKVOT = B(J,K)/R(K,K)
DO 46 N = KA, LS2
46 R(J,N) = R(J,N) - RKVOT*R(K,N)
10 CONTINUE
DO 20 N = 1, LS1
K = LS2 - N
IF (KH(K) .GT. 3) GO TO 20
IF (R(K,K) .NE. 0. .AND. R(K,LS2) .NE. 0.) GO TO 62
PI(K) = 0.
K = K - 1 - MPA
IF (K .LE. 0) GO TO 20
I = ISOL(K)
Y(I) = 0.
GO TO 55
62 PI(K) = R(K,LS2)/R(K,K)
KA = K - 1
IF (KA .EQ. 0) GO TO 20
DO 58 J = 1, KA
58 R(J,LS2) = R(J,LS2) - PI(K)*R(J,K)
20 CONTINUE
IF (IVAR .EQ. 0 .OR. IVARJ .GE. 0 .OR. SLAM .LT. 0.1) GO TO 66
DO 70 J = 1, L
IF (DABS(PI(J)) .GT. 1.E-8 .AND. DABS(OPI(J)/PI(J)-1.) .GT. DMIN)
1GO TC 65
70 CONTINUE
NR = 0
IF (NG .EQ. 1) GO TO 155
DO 157 K = 2, NG
IF (NSUM(NG) .EQ. -NSUM(K-1)) NR = NR + 1
157 CONTINUE
155 DO 143 N = 1, MP
IF (YTOT(N) .GT. 0.) GO TO 143
CALL XBER
YFTOT(N) = 0.
DO 144 I = NA, MB
YFTOT(N) = YFTOT(N) + YF(I)
YI(I) = YF(I)
AKT(I) = 0.
144 YF(I) = 0.
IF (NV.EQ.0) GO TO 326
YA=0.
DO 325 I=1,SL(1)
325 YA=Y(I)+YA
PTOT=YA*.0821*T/V
326 CONTINUE
IF (S .EQ. 1) YFTOT(N) = YFTOT(N)/PTOT
143 CONTINUE
145 DIFM = 1.
DO 158 N = 1, MP

```

```

      IF (YTOT(M) .GT. 0. .OR. YPTOT(M) .LE. DIPH) GO TO 158
      KA = M
      DIPH = YPTOT(M)
158  CONTINUE
      IF (DIPH .EQ. 1.) GO TO 138
      IF (NR .EQ. 0) GO TO 159
      NR = NR - 1
      YPTOT(KA) = 1.
      GO TO 145
159  NSUM = NSUM(M)
      YTOT(KA) = 1.
      NA = NP(KA)
      NB = ML(KA)
      DO 153 I = NA, NB
153  Y(I) = YSUM*YI(I)/YPTOT(KA)
      GO TO 47
138  IF (MS .LT. M1) GO TO 51
      DIPH = 0.
      DO 54 I = M1, MS
      IF (NO(I) .EQ. 0 .OR. Y(I) .GT. 0.) GO TO 54
      PIA = -G(I)
      DO 56 J = 1, L
56  PIA = PIA + A(I,J)*PI(J)
      IF (PIA .LT. DIPH) GO TO 54
      KA = I
      DIPH = PIA
54  CONTINUE
      IF (DIPH .EQ. 0.) GO TO 51
      Y(KA) = YSUM
      GO TO 55
51  IF (MX .EQ. 1) GO TO 93
      DO 168 N = 1, MPA
      M = IPAS(N)
      IF (MF(M) .NE. ML(N)) GO TO 168
      NA = NP(M)
      DO 173 J = 1, L
      IF (A(MA,J) .EQ. A0(MA,J)) GO TO 173
      MX = 1
      GO TO 171
173  CONTINUE
168  CONTINUE
93  IVARJ = 0
      GO TO 66
65  DO 60 J = 1, L
60  OPI(J) = PI(J)
66  SLAM = 1.
      DO 12 N = 1, MPA
      L1 = L + N
      M = IPAS(N)
      NA = NP(M)
      NB = ML(M)
      DO 12 I = NA, NB
      IF (Y(I) .EQ. 0.) GO TO 12
      PIA = P(I) - PI(L1)
      DO 19 J = 1, L
19  PIA = PIA - A(I,J)*PI(J)
      YI(I) = PIA*Y(I)

```

```

      IF (PIA .GT. SLAM) SLAM = PIA
12  CONTINUE
      IF (SLAM .GT. 1.) SLAM = 0.999*(SLAM - 0.5)/(SLAM*SLAM)
      IF (MSA .EQ. 0) GO TO 72
      DO 53 M = 1, MSA
        I = ISOL(M)
        K = 1 + MPA + M
        IF (PI(K) .LT. 0.) L1 = 0
        IF (IVAR .EQ. 0 .OR. PI(K) .GT. -Y(I)) GO TO 53
        IF (SLAM .LT. 1. .AND. -PI(K)/YSUM .LT. 1.E8) GO TO 53
        Y(I) = 0.
        GO TO 55
53  Y(I) = DABS(PI(K))
72  YSUM = 0.
      DO 128 M = 1, MPA
        N = IFAS(M)
        NA = NF(M)
        NB = NL(M)
        DO 29 I = NA, NB
          IF (Y(I) .EQ. 0.) GO TO 29
          Y(I) = Y(I) - SLAM*YX(I)
          IF (Y(I) .LT. 1.E-20) Y(I) = 0.
29  CONTINUE
      CALL ABER
      IF (YTOT(M) .EQ. 0.) GO TO 47
128 YSUM = YSUM + YTOT(M)
      IVAR = IVAR + 1
      IF (IVAR .EQ. 25 .OR. IVAR .EQ. 50) DMIN = 100.*DMIN
      IF (IVAR .EQ. 75) GO TO 59
      IF (IVARJ .LT. 0 .OR. I1 .EQ. 0 .OR. SLAM .LT. 1.) GO TO 16
      IVARJ = IVARJ + 1
      IF (IVARJ .EQ. 10) GO TO 88
      DO 3 M = 1, MPA
        N = IFAS(M)
        NA = NF(M)
        NB = NL(M)
        DO 3 I = NA, NB
          IF (Y(I) .GT. 0. .AND. DABS(YX(I))/Y(I) .GT. 1.E-6) GO TO 16
3  CONTINUE
88  DO 149 M = 1, MPA
      N = IFAS(M)
      CALL XBER
      IF (NA .NE. NB) GO TO 133
      DO 92 J = 1, 1
        IF (A(MA,J) .NE. A0(MA,J)) Y(MA) = A(MA,J)/A0(MA,J)*Y(MA)
92  CONTINUE
133 DO 149 I = NA, NB
      IF (NO(I) .EQ. 0 .OR. Y(I) .GT. 0.) GO TO 149
      Y(I) = YTOT(M)*YF(I)
      IF (Y(I) .LT. 1.E-20 .OR. LX(I) .EQ. 1) GO TO 149
      LX(I) = 1
      GO TO 133
149 CONTINUE
      IF (IVARJ .EQ. 10) N = 0
      RETURN
      END

```

```

SUBROUTINE ABER
  IMPLICIT REAL*8 (A-H,O-Z)
  COMMON A(99,10), AO(99,10), AKT(99), AKTF(99), B(10,99), BO(10),
  SG(99), RH(20), L, M, M1, MA, MB, MP(20), ML(20), NP, NS, NO(99),
  SNP, P1(20), PTOT, T, TEXT(99), Y(99), YP(99), YTOT(20), V, NV, NVV
  YTOT(M) = 0.
  DO 2 I = MA, MB
    2 YTOT(M) = YICT(M) + Y(I)
  IF (YTOT(M) .GE. 1.E-8) GO TO 151
  YTOT(M) = 0.
  RETURN
151 CONTINUE
  IF (AV.EQ.0) GO TO 326
  YA=0.
  DO 325 I=1,ML(1)
    325 YA=Y(I)*YA
  PTOT=YA*.0821*T/V
  326 CONTINUE
  IF (B .EQ. 1) YTOT(1) = YTOT(1)/PTOT
  DO 127 I = MA, MB
    127 YP(I) = Y(I)/YTOT(M)
  CALL FACTOR
  DO 141 I = MA, MB
    141 AKT(I) = AKTF(I)*YP(I)
  RETURN
END

```

```
SUBROUTINE YRER
  IMPLICIT REAL*8 (A-H,O-Z)
  COMMON A(99,10), AO(99,10), AKT(99), AKTF(99), B(10,99), BO(10,
  $G(99), KH(20), L, M, N1, NA, NB, NP(20), NL(20), NP, NS, NO(99),
  $NP, PI(20), PTOT, T, TEXT(99), Y(99), YF(99), YTOT(20), V, NV, NVV
  DIMENSION OYP(99)
  PLOG = DMAX1(DLOG(PTOT), 10.)
  NA = NP(N)
  NB = NL(N)
  DO 38 I = NA, NB
    IF (NO(I) .EQ. 0 .OR. Y(I) .GT. 0.) GO TO 38
    PIA = -G(I)
    DO 87 J = 1, L
      87 PIA = PIA + A(I,J)*PI(J)
    IF (PIA .GT. PLOG) PIA = PLOG
    AKT(I) =DEXP(PIA)
    YF(I) = AKT(I)
  38 CONTINUE
  IVAR = 0
147 IVAR = IVAR + 1
  IF (IVAR .LT. 25) CALL FACTOR
  DO 139 I = NA, NB
    OYP(I) = YF(I)
  139 YF(I) = AKT(I)/AKTF(I)
  DO 137 I = NA, NB
    IF (YF(I) .GT. 0. .AND. DABS(OYP(I)/YF(I)-1.) .GT. 1.E-4) GO TO 147
  137 CONTINUE
  RETURN
END
```



SUBROUTINE FACTOR  
 IMPLICIT REAL\*8 (A-H,O-Z)  
 COMMON A(99,10), AO(99,10), AKT(99), AKTP(99), B(10,99), BO(10),  
 SG(99), RH(20), L, R, RI, RA, RB, RP(20), RL(20), RP, RS, RU(99),  
 SNP, PI(20), PTOT, T, TEXT(99), Y(99), YP(99), YTOT(20), V, NV, NVV

C  
 C THE ACTIVITY COEFFICIENT EXPRESSIONS FOR THE SPECIES IN THE NONIDEAL  
 C MIXTURES ARE INSERTED AFTER THE STATEMENT NUMBER THAT CORRESPONDS TO  
 C THE MIXTURE NUMBER. FOR A SOLID WITH VARIABLE STOICHIOMETRY WHICH IS  
 C REGARDED AS A SEPARATE MIXTURE, THE COMPOSITION MUST ALSO BE SPECIFIED  
 C (MAXIMUM ONE STOICHIOMETRIC COEFFICIENT IS ALLOWED TO DEVIATE).

C  
 C NOTICE THAT AN AMOUNT OF A SPECIES WHICH IS LESS THAN 1.E-20 MOLES  
 C IS SET EQUAL TO ZERO.

C  
 C AO = A DEVIATING STOICHIOMETRIC COEFFICIENT  
 C AKT = ACTIVITY  
 C AKTP = ACTIVITY COEFFICIENT  
 C Y = AMOUNT OF SUBSTANCE  
 C YP = MOLE FRACTION OR PARTIAL PRESSURE  
 C

GO TO (1,2,3,4,5,6,7,8,9,10), R

1 CONTINUE  
 RETURN  
 2 CONTINUE  
 RETURN  
 3 CONTINUE  
 RETURN  
 4 CONTINUE  
 RETURN  
 5 CONTINUE  
 RETURN  
 6 CONTINUE  
 RETURN  
 7 CONTINUE  
 RETURN  
 8 CONTINUE  
 RETURN  
 9 CONTINUE  
 RETURN  
 10 CONTINUE  
 RETURN  
 END

SUBROUTINE SPEQUA  
IMPLICIT REAL\*8 (A-H,O-Z)  
COMMON A(99,10), AO(99,10), AKT(99), AKTP(99), B(10,99), BO(10),  
SG(99), KH(20), L, N, H1, HA, HB, HP(20), HL(20), HP, HS, NO(99),  
SNP, PI(20), PTOT, T, TEXT(99), Y(99), YP(99), YTOT(20), V, NV, NVV

SPEQUA IS A SUBROUTINE FOR CALCULATION OF QUANTITIES WHICH ARE  
DERIVABLE FROM THE EQUILIBRIUM COMPOSITION.

RETURN  
END

DISTRIBUTION LIST - TECHNICAL REPORTS  
CONTRACT N00014-79-C-0121

Office of Naval Research Code 427Y 800 North Quincy Street Arlington, VA 22217	4	Commandant Marine Corps Scientific Advisor (Code AX) Washington, D.C. 20380	1
Naval Research Laboratory 4555 Overlook Avenue, S.W. Washington, D.C. 20375 Attn: Code 2627	6	Commander, AFAL AFAL/DHM Mr. Richard L. Remski Wright-Patterson AFB, OH 45433	1
6812	1		
6820	2	Professor Walter Ku Phillips Hall Cornell University Ithaca, NY 14853	1
Defense Documentation Center Building 5, Cameron Station Alexandria, VA 22314	12		
Dr. Y. S. Park AFAL/DHR Building 450 Wright-Patterson AFB Ohio 45433	1	Commander Harry Diamond Laboratories Mr. Horst W. A. Gerlach 2800 Powder Mill Road Adelphia, MD 20783	1
ERADCOM DELET-M Fort Monmouth, NJ 07703	1	Advisory Group on Electron Devices 201 Varick Street, 9th floor New York, NY 10014	1
Dr. Harry Wieder Naval Ocean Systems Center Code 922 271 Catalina Blvd. San Diego, CA 92152	1	Professor L. Eastman Phillips Hall Cornell University Ithaca, NY 14853	1
Dr. William Lindley MIT Lincoln Laboratory F124A, P. O. Box 73 Lexington, MA 02173	1	Professors Hauser and Littlejohn Department of Electrical Engr. North Carolina State University Raleigh, North Carolina 27607	1
Mr. Sven Roosild AFCRL/LQD Hanscom AFB, MA 01731	1	Dr. R. S. Feigelson Center for Materials Research Stanford University Stanford, California 94305	1
Commander U.S. Army Electronics Command V. Gelnovatch (DRSEL-TL-IC) Fort Monmouth, NJ 07703	1		